



**16 Channel
2-HDD DVR**


4K Sentinel *immix* ONVIF

UDVR302-16Q

KEY FEATURES


- Support TVI,AHD, CVI,CVBS, IP cameras with adaptive access
- 16-channel BNC input
- Up to 8MP resolution for recording on channels 1-4
- Support 1-ch HDMI/ 1-ch VGA output at up to 1920*1080
- Long transmission distance over coax cable

DIMENSIONS

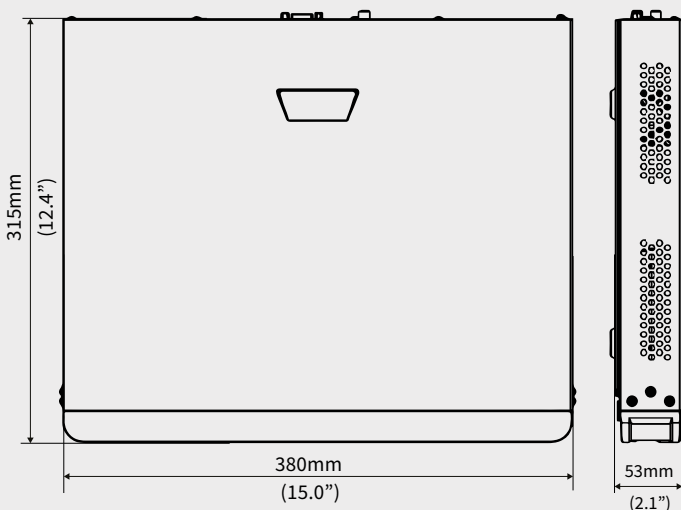


Software Interface Mobile & CMS

CMS Menu

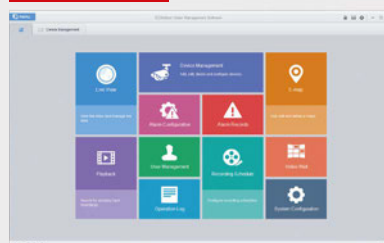


Playback

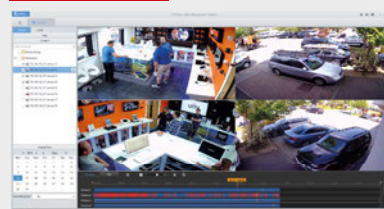

Mobile app

Playback /Live View

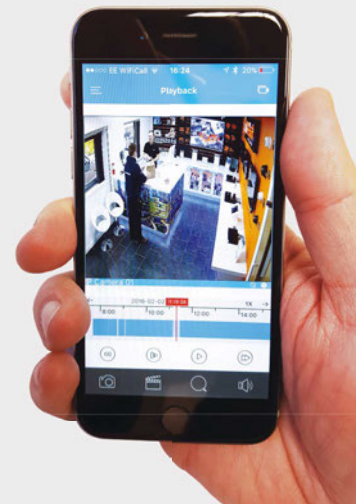

SPECIFICATION



Model	UDVR302-16Q
Video/Audio Input	
Analog Video Input	16-ch, BNC
IP Video Input	8-ch(only IP up to 24ch), each channel up to 4K
Supported Analog Camera Types	Support AHD input: 8MP@15fps (channel1-channel4) 5MP@20fps, 4MP@30fps, 3MP@30fps, 1080P@30fps, 720P@60fps Support TVI input: 8MP@15fps (channel1-channel4), 5MP@20fps, 4MP@30fps, 3MP@20fps, 1080P@30fps,720P@60fps Support CVI input: 8MP@15fps(channel1-channel4), 4MP@30fps, 1080P@30fps, 720P@60fps, Support CVBS input
Audio Input	1-ch, RCA
Two-way Audio	Yes
Audio Output	1-ch, RCA
Network	
Incoming Bandwidth	72Mbps
Outgoing Bandwidth	80Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
Video Output	
CVBS Output	1-ch, BNC
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
HDMI Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	8MP Lite/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF
Synchronous Playback	16-ch
Encoding	
Recording Frame Rate	Main stream: 8MP Lite@8fps(channel1-channel4) , 5MPLite@12fps, 4MP Lite@15fps, 3MP@15fps(channel1 - channel4), 2MP@15fps, 720P@30fps Sub stream: D1@30fps(Max)
Recording Resolution	8MP Lite/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF
Hard Disk	
SATA	2 SATA interface
Capacity	up to 10TB for each HDD
External Interface	
Network Interface	1RJ45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1 x USB3.0,Front panel: 1xUSB2.0
Serial Interface	1 x RS485
General	
Power Supply	12V DC Power Consumption: ≤ 12 W(without HDD)
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions(W×D×H)	380mm ×315mm× 53mm (15" × 12.4"×2.1")
Weight (without HDD)	≤1.9 Kg (4.19lb)

**“Best value DVR
in the UK”**

