




32 Channel 4K PoE NVR

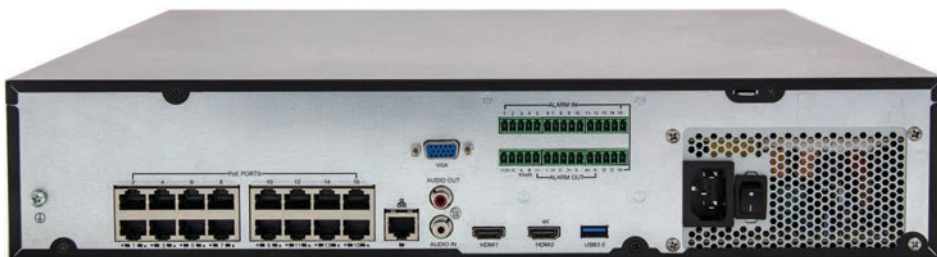


UNVR308-32E

KEY FEATURES




- Support Ultra 265/H.265/H.264 video formats
- 32-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile C, Profile Q, Profile A, Profile T
- Support 2-ch HDMI, 1-ch VGA, 1-ch CVBS, HDMI2 at up to 4K(3840x2160) resolution
- HDMI1/VGA and HDMI2 independent outputs provided
- Up to 12 Megapixels resolution recording
- Support RAID 0, 1, 5, 6, 10
- 8 SATA HDDs, Up to 8TB for each HDD
- Support N+1 Hot spare
- Support for 12V Power output
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

DIMENSIONS

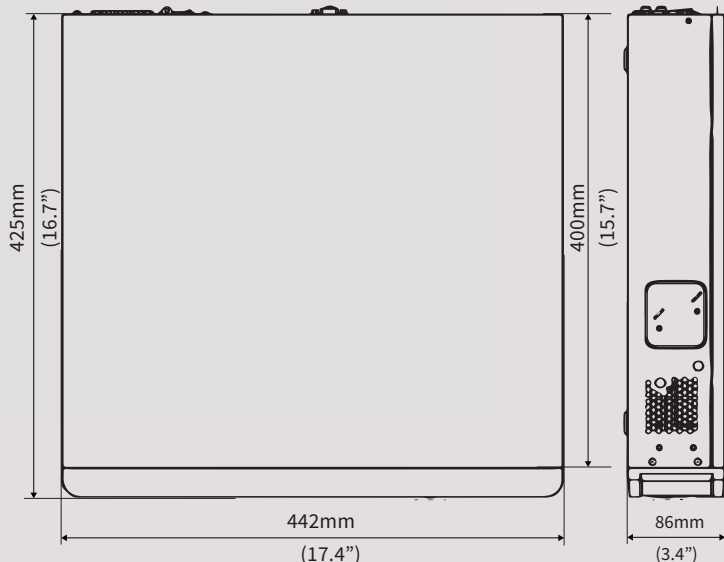

Software Interface Mobile & CMS

CMS Menu




Playback



Mobile app

Playback /Live View

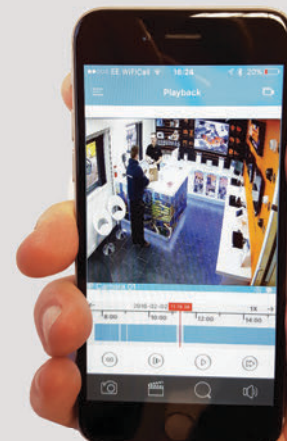

SPECIFICATION



Model	UNVR308-32E
Video/Audio Input	
IP Video Input	32-ch
Two-way Audio Input	1-ch, RCA
Network	
Incoming Bandwidth	320Mbps
Outgoing Bandwidth	320Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
HDMI/VGA Output	HDMI1/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI2: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz
CVBS Output	1-ch, BNC
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output 1-ch, RCA	
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	16-ch
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
Decoding	
Decoding format	Ultra 265, H.265, H.264
Live view/ Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	3 x 12MP@25, 4 x 4K@30, 8 x 4MP@30, 16 x 1080P@30, 32 x 960P@25, 36 x 720P@30, 64 x D1
Hard Disk	
SATA	8 SATA interfaces
Capacity	up to 8TB for each HDDs
eSATA	1 eSATA interface
Smart	
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change
VCA Search	Face search, Behavior search
Statistical Analysis	People counting
Disk Array	
Array Type	RAID 0, 1, 5, 6, 10 External Interface
External Interface	
Network Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces
Serial Interface	1 x RS232, 1 x RS485
USB Interface	Front panel: 2 x USB2.0, Rear panel: 1 x USB3.0
Alarm In	16-ch
Alarm Out	4-ch
General	
Power Supply	100 ~ 240 VAC Power Consumption: ≤ 20 W(without HDD)
Dimensions(W×D×H)	442mm ×425mm× 86mm (17.4" × 16.7" ×3.4")
Weight (without HDD)	≤ 5.13 Kg (11.31 lb)

“Incredible value,
incredible
performance”

