



**4 Channel  
1-SATA NVR**


**4K** Sentinel *immix* ONVIF

**XVR301-04Q**

**KEY FEATURES**

- Support H.265/H.264 video formats
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 4/8-channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920\*1080
- Long transmission distance over coaxial cable


**DIMENSIONS**

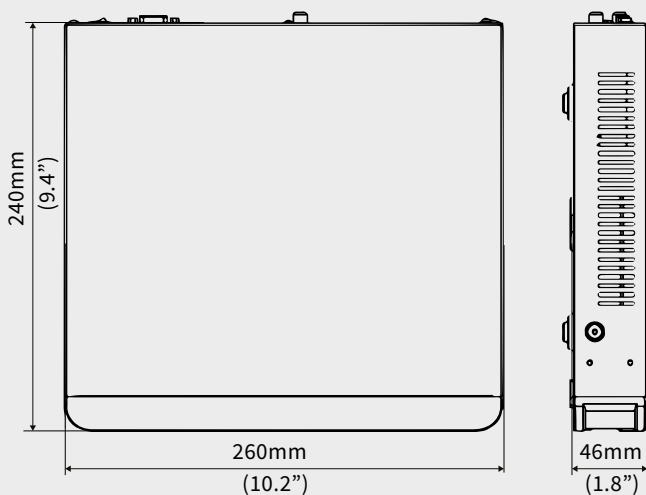

**Software Interface Mobile & CMS**



**Mobile app**  
Playback /Live View

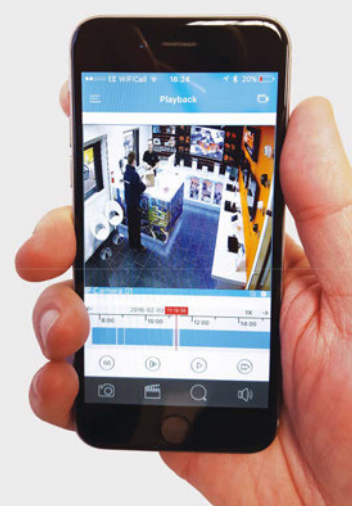

# SPECIFICATION



Model	<b>XVR301-04Q</b>
Video/Audio Input	
Analog Video Input	4-ch, BNC
IP Video Input	2-ch(only IP up to 6ch),each channel up to 4K
Supported Analog Camera Types	<b>Support AHD input:</b> 8MP@15fps (channel1) 5MP@20fps, 4MP@30fps, 3MP@30fps (channel1), 1080P@30fps, 720P@60fps
	<b>Support TVI input:</b> 8MP@15fps (channel1), 5MP@20fps, 4MP@30fps, 3MP@20fps (channel1), 1080P@30fps, 720P@60fps
	<b>Support CVI input:</b> 8MP@15fps (channel1), 5MP@20fps, 4MP@30fps, 1080P@30fps, 720P@30fps, Support CVBS input
Audio Input	1-ch, RCA
Two-way Audio	1-ch, RCA
Network	
Incoming Bandwidth	48Mbps
Outgoing Bandwidth	60Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
Video Output	
CVBS Output	1-ch, BNC
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
HDMI Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Audio Output	1-ch, RCA
Synchronous Playback	4-ch
Encoding	
Recording Resolution	8MP Lite/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF
Recording Frame Rate	<b>Main stream:</b> 8MP Lite@8fps(channel1) , 5MPLite@12fps, 4MP Lite@15fps, 3MP@15fps, 2MP@15fps, 720P@30fps <b>Sub stream:</b> D1@30fps(Max)
Hard Disk	
SATA	1 SATA interface
Capacity	Up to 6TB for each HDD
External Interface	
Network Interface	1RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel : 2 x USB2.0
Serial Interface	1 x RS485
General	
Power Supply	12V DC Power Consumption: ≤ 8 W( without HDD )
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions(W×D×H)	260mm ×240mm× 46mm (10.2" × 9.4"×1.8")
Weight ( without HDD )	≤1.1 Kg ( 4.19lb )

**“Best value DVR  
in the UK”**

